




FULL-SIZE, FULL-MATRIX PORTABLE CHANGEABLE MESSAGE SIGN

QUÉBEC

With its high-performance LED lights, the PCMS-1505 (PMV-1505) is ideal for posting messages on high-speed roads or at busy outdoor events. It is managed remotely, is solar-powered, and requires minimal maintenance. This message sign was designed to meet the requirement stipulated in the ministère des Transports du Québec's Tome V on road signage.

3 WAYS TO CHANGE A MESSAGE :

- AT THE SIGN, V-TOUCH CONTROLLER
- NEAR THE SIGN OR REMOTELY, JAMLOGIC® WEB ON YOUR TABLET OR SMARTPHONE
- REMOTELY, JAMLOGIC® COMPUTER SOFTWARE ON YOUR COMPUTER OR LAPTOP

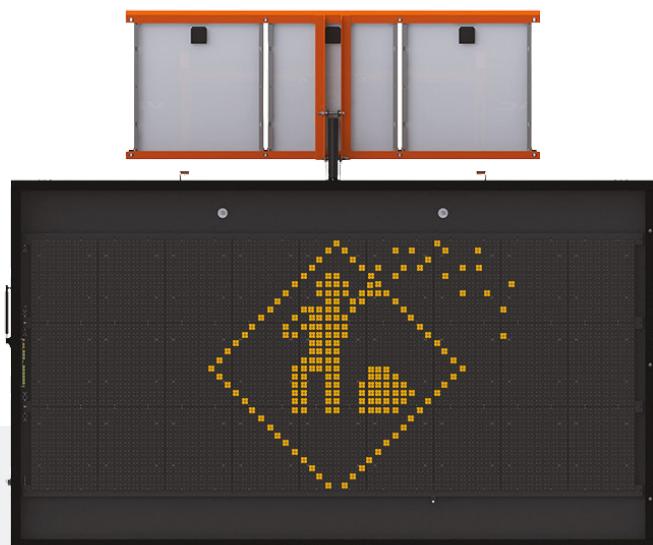

PRO SERIES FEATURES

STEALTH TECHNOLOGY

Maintenance-free batteries
Anti-theft hidden battery compartment

V-TOUCH CONTROLLER

Integrated 4G modem
10 year cell plan

HIGH-PERFORMANCE LEDS

Brighter with greater angularity
Greater power efficiency for longer autonomy

JAMLOGIC SOFTWARE

Hourly automated status and battery/GPS alerts & reports
Interactive map & list view of all equipment
Project folders to organize equipment
Logs date/time of all remotely activated messages

CONNECTED DEVICE

Compatible with the Connected Work Zone (CWZ)*
data-sharing feeds

*Previously the Work Zone Data Exchange (WZDx)



APPLICATIONS

- Highway construction
- Connected work zones
- Advertising / special events
- Smart work zones
- Main roads
(43 mile/h and more)

OTHERS FEATURES

DURABLE, EASY TO USE

4 LEVELING JACKS

Stabilization and easy transportation

TONGUE WHEEL JACK

Easy and safe trailer setup

ELECTRO-HYDRAULIC LIFT MECHANISM

Quick and effortless deployment

RUGGED ROD MAST BRAKE

360° rotation (6° increments and infinite positions using manual hand brake)

LOCKABLE CONTROL BOX

To protect the controller, modem, pump, and other components

2-IN. (51 MM) COUPLER OR 3-IN. (76 MM) PINTLE EYE

For easy towing

V-TOUCH CONTROLLER

EASY-TO-READ

7-inch (178 mm) color LCD touchscreen display

TIME-SAVING

Create your own library of messages

SIMPLE TO OPERATE

Intuitive point-and-go icons make displaying and editing messages quick and easy



SPECIFICATIONS

DISPLAY

- Display panel: 75 1/2 x 131 1/2 in. (1917 x 3343 mm)
- Full-matrix of 30 x 72 pixels
- 4 LEDs per pixel
- 3 lines of 12 characters per line (default) & graphics capability
- Default font of 12 in. (305 mm) (5 x 7 pixels)
- Up to 15 characters per line (4 x 7 font)
- Display sign rotates 360 degrees for perfect setting
- Panel material: aluminium

DIMENSIONS & WEIGHTS

- Overall length: 182 in. (4637 mm)
- Overall width: 86 1/2 in. (2197 mm)
- Traveling height: 106 1/2 in. (2703 mm)
- Operating height: 196 in. (4979 mm)
- Axle/suspension: 3,500 lbs (1588 kg)
- Weight (approx.): 1,820 lbs (825.5 kg)

OPTIONS

- Radar
- Data logger (requires radar)
- Battery charger
- PTZ camera
- Fixed camera

Other options are available to meet your needs.

WARRANTY

- 1 year on complete trailer
- 2 years on electronic components manufactured by Ver-Mac

