



FULL-SIZE, FULL-MATRIX PORTABLE CHANGEABLE MESSAGE SIGN

The PCMS-1500 is a full-matrix portable message sign ideal for displaying messages with a variety of text, graphics, and font sizes for highway work zones.

State-of-the-art LEDs, an autonomous power design, minimal maintenance, and easy remote management make the PCMS-1500 the most visible, reliable, and cost-effective message sign in the industry.

3 WAYS TO CHANGE A MESSAGE :

- AT THE SIGN, V-TOUCH CONTROLLER
- NEAR THE SIGN OR REMOTELY, JAMLOGIC® WEB ON YOUR TABLET OR SMARTPHONE
- REMOTELY, JAMLOGIC® COMPUTER SOFTWARE ON YOUR COMPUTER OR LAPTOP

PRO SERIES FEATURES

STEALTH TECHNOLOGY

Maintenance-free batteries
Anti-theft hidden battery compartment

V-TOUCH CONTROLLER

Integrated 4G modem
10 year cell plan

HIGH-PERFORMANCE LEDS

Brighter with greater angularity
Greater power efficiency for longer autonomy


JAMLOGIC SOFTWARE

Hourly automated status and battery/GPS alerts & reports
Interactive map & list view of all equipment
Project folders to organize equipment
Logs date/time of all remotely activated messages

CONNECTED DEVICE

Compatible with the Connected Work Zone (CWZ)* data-sharing feeds

**Previously the Work Zone Data Exchange (WZDX)*

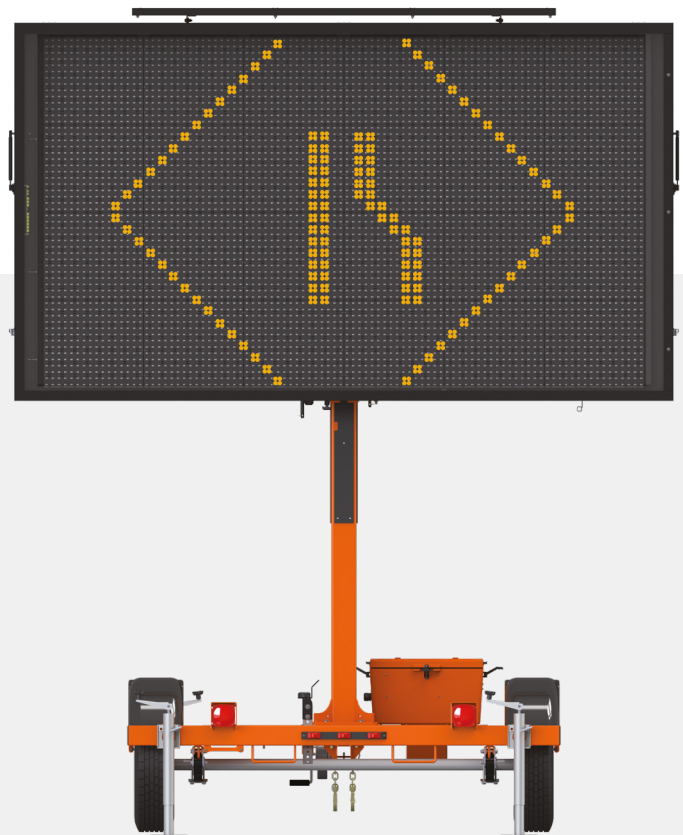

APPLICATIONS

- Highway construction
- Advertising / Special events
- Smart work zones
- Connected work zones

OTHERS FEATURES

DURABLE, EASY TO USE

4 LEVELING JACKS

Stabilization and easy transportation

TONGUE WHEEL JACK

Easy and safe trailer setup

ELECTRO-HYDRAULIC LIFT MECHANISM

Quick and effortless deployment

RUGGED INDEXED ROD MAST BRAKE

360° rotation (6° increments and infinite positions using manual hand brake)

LOCKABLE CONTROL BOX

To protect the controller, modem, pump, and other components

2-IN. (51 MM) COUPLER OR 3-IN. (76 MM) PINTLE EYE

For easy towing

V-TOUCH CONTROLLER

EASY-TO-READ


7-inch (178 mm) color LCD touchscreen display

TIME-SAVING

Create your own library of messages

SIMPLE TO OPERATE

Intuitive point-and-go icons make displaying and editing messages quick and easy

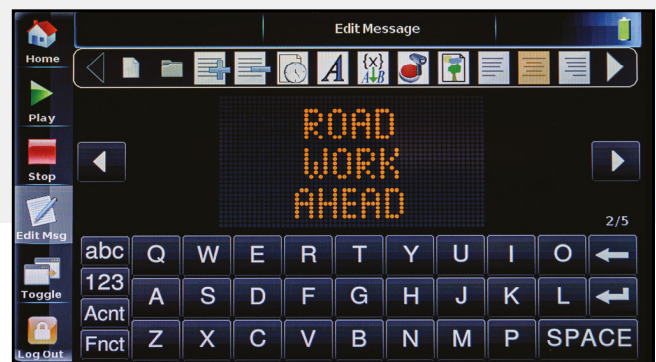

SPECIFICATIONS

DISPLAY

- Display panel: 131 x 75 in. (3331 x 1917 mm)
- Full-matrix of 28 x 48 pixels
- 4 LEDs per pixel
- 3 lines of 8 characters per line (default) & graphics capability
- 5 x 7 pixels (18 in.) characters (default)
- Display sign rotates 360° for perfect positioning
- Improved plug-and-play display modules for simplified maintenance

DIMENSIONS & WEIGHTS

- Operating height: 165 in. (4196 mm)
- Overall length: 183 in. (4637 mm)
- Traveling height: 106 in. (2707 mm)
- Traveling width: 87 in. (2197 mm)
- Weight (approx.): 1,740 lbs (790 kg)
- Axle/suspension: 3,500 lbs (1588 kg)

OPTIONS

- Battery charger
- Radar
- Data logger (requires radar)
- Fixed camera
- Tilt-and-rotate solar panels

Other options are available to meet your needs.

WARRANTY

- 1 year on complete trailer
- 2 years on electronic components manufactured by Ver-Mac

